
Brand	hansgrohe
Art. Name	**Ecostat Fine** Bath thermostat for exposed installation
Art. Nr.	13325000
Surface	Chrome

Product picture



Drawing

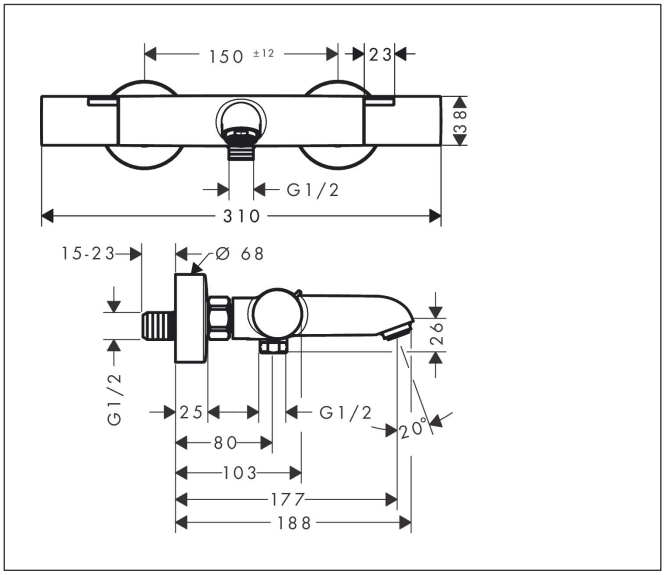

Features

- projection 177 mm
- 2 functions
- temperature and water flow control
- thermostat cartridge, shut-off/ diverter valve
- spray type spout: NormalSpray
- maximum flow rate at 3 bar: 20 l/min
- flow rate for bath spout at 3 bar: 20 l/min
- maximum flow rate of hand shower at 3 bar: 16 l/min
- min. operating pressure: 1 bar
- max. operating pressure: 10 bar
- Safety stop at 40 °C
- temperature limitation adjustable
- non-return valve
- protected against backflow, according to DIN EN 1717
- with silencer
- material handles: metal
- connection dimension: DN15
- connection type: G ½
- centre distance: 150 ± 12 mm
- dirt filter included

Technology



Brand	hansgrohe
Art. Name	**Ecostat Fine** Bath thermostat for exposed installation
Art. Nr.	13325000
Surface	Chrome

Flow chart

