

Technical data sheet

A34
Framing Anchor/Universal Framing Anchor

The A34E anchor's exclusive bending slot allows instant, accurate bending on site for all two and three-way connections.


Balanced, completely reversible design allows the A34E to be used to secure a wide variety of connections.

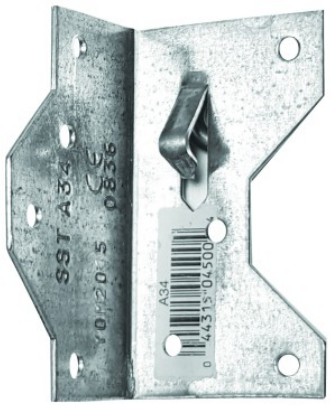

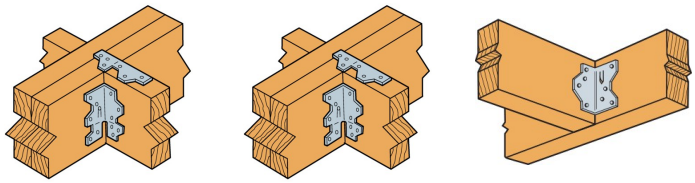

A34
Framing Anchor/Universal Framing Anchor

Technical Data



A34 / A35

References	Dimensions [mm]				Holes	
	A	B	C	t	Flange A	Flange B
					Ø4.1	Ø4.1
A34E	33	33	64	1.2	4	4

A34E Performance Values

References	Number of Fasteners		Installation	Characteristic Capacity - Timber C24(3) [kN]	Safe Working Load - Timber C16 [kN]											
	Flange A	Flange B		$R_{2,k}$	Long Term						Medium Term					
	N3.75x30	N3.75x30			$R_{1,SWL}$	$R_{2,SWL}$	$R_{3,SWL}$	$R_{4,SWL}$	$R_{5,SWL}$	$R_{6,SWL}$	$R_{1,SWL}$	$R_{2,SWL}$	$R_{3,SWL}$	$R_{4,SWL}$	$R_{5,SWL}$	R_{6}
A34E	4	4	1	-	1.3	1.3	-	1.1	-	-	1.5	1.5	-	1.2	-	

(3) Based upon 2 No brackets installed diagonally opposite to each other

Winchester Road Cardinal Point Tamworth
Staffordshire B78 3HG
tel: +44 1827 255600
fax: +44 1827 255616

Copyright by Simpson Strong-Tie®
Information presented on this document is the exclusive property of Simpson Strong-Tie®
It is valid only when associated with products supplied by Simpson Strong-Tie®